

simalube - the automatic single point lubricator that offers a wide range of product benefits



Trust the Original!

Any bearing deprived of correct lubrication will fail within its predicted lifespan leading to high repair costs. As a result, simatec has developed an advanced generation of **simalube** - the automatic single point lubricator which has been proven millions of times. Two new lubricator sizes cover the wide spectrum of manifold grease applications even better.

simalube - progress through continuous development

- Now available in four sizes simalube 30, 60, 125 and 250 ml (1, 2, 4 and 8. fl.oz.)
- Working temperature range from -4° F to +131° F
- Maximum working pressure of 5 bar (75 psi)
- Short initial periods


The New Generation

Swiss made / worldwide patents



The practical benefits of simalube:

- Simple to install and to activate
- operates automatically 24 hours a day, 7 days a week
- powered by a patented gas generating dry cell
- Adjustable time setting from 1 to 12 months reduces inventory costs, as one lubricator covers a wide range of requirements
- Available in four sizes: simalube 30, 60, 125 and 250 ml (1, 2, 4 and 8 fl.oz.)
- Transparent container allows easy check of lubricant levels
- Compact size permits installation in restricted areas with limited space
- Sealed point of contact prevents contamination with dirt or foreign matter
- No harmful chemicals to generate the drive gas
- Easy adjustment of dispensing rate during operation
- Can be temporarily deactivated
- Refillable kits available
- Environmentally friendly and easy to dispose
- Intrinsically safe (Class1/DIV1), various safety approvals, Ex, GS, and FM, TÜV
- Wide range of accessories is available such as adapter, tubes and brushes

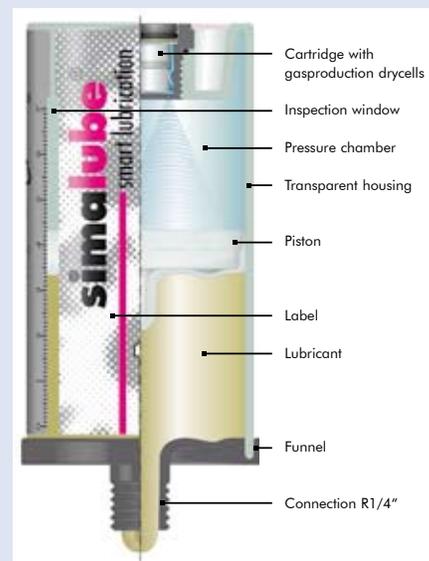





dry cells



easy to activate



accessories



simalube standard lubricants

No.	Application	Temp. range (in the area of lubrication)
SL01	General multi-purpose industrial grease	-22 / + 248 °F
SL02	High performance grease with MoS2 (moly)	- 4 / + 347 °F
SL04	High temperature grease	32 / + 338 °F
SL06	Fluid grease	- 4 / + 260 °F
SL09	Biodegradable grease	- 22/ + 248 °F
SL10	High performance multi-purpose grease for the food industry	- 0 / + 275 °F
SL14	Gear / chain oil	14/ + 212 °F
SL15	High temperature chain oil	max. 500 °F
SL18	Food grade oil	°F
SL24	Grease for a wide temperature range	- 4 /+ 284 °F
SL25	High pressure grease	- 40/+ 350 °F

simatec inc.

13900-C South Lakes Drive
Charlotte, NC 28273
USA

Phone: +1 (704) 588-3320
Fax: +1 (704) 588-2112
Toll-Free: +1 888-SIMATEC (1-888-746-2832)
www.simatec-usa.com info@simatec-usa.com

simatec
smart technologies