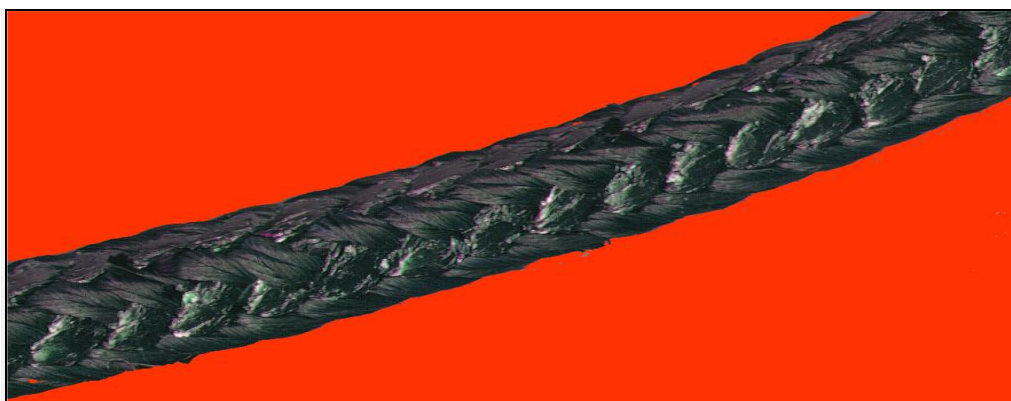

EUROSEAL 20091



EUROSEAL® 20091. Is the result of an exclusive manufacturing process of the expanded mineral graphite. This product is reliable packing for high-speed rotary pumps.

EUROSEAL® 20091. has been developed to meet the requirements of hydrocarbon processing plants, chemical plants, refineries, power generating industries.

EUROSEAL® 20091. has a good heat conduction, is self-lubricant, non-hardening. No “End-rings” required

EUROSEAL® 20091. “Proper technology for pumps and valves applications”.

One solution for pumps and valves.

	<i>ROTARY PUMPS</i>	<i>VALVES</i>
<i>P (bar)</i>	90	90
<i>T (C°)</i>	- 204	Up to 650
<i>V (m/s)</i>	25	
<i>pH</i>	0 - 14	