


**T x P charts for gaskets in GUAFLON BLUE SEAL.**

The charts provide a guideline for a conservatively safe use of the gasket material, showing the temperature and pressure fields where the gasket can be employed to achieve a high level of tightness, for a service life of several years, subject to chemical compatibility.

Precautions must be taken when sealing very aggressive media, or when thermal or mechanical disturbances may occur.

For application below -50°C the gasket keeps its effectiveness provided that it is installed completely dry and that flange loading is applied at room temperature.

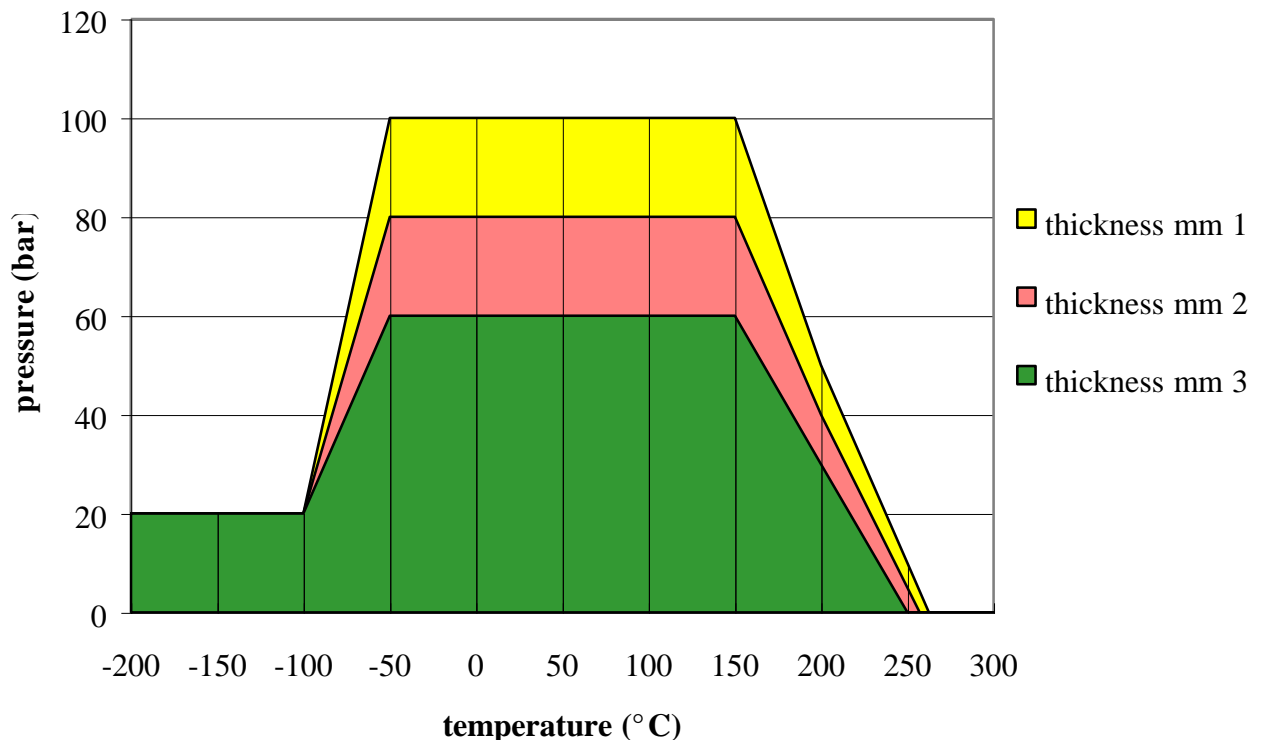

Note: best gasket performance is achieved if the assembly parameters are optimized in function of joint design and service conditions, using GUARCO-DISK programme for personal computer