

SL24

The Original

The New Generation

Interlam

Kalimalang Commercial Centre Blok B4 No. 7
Jln. Jend. Ahmad Yani, Bekasi Barat 17144
Tel. +62 (21) 889 53337 (Hunting)
+62 (21) 68 522 866
Fax +62 (21) 884 0107
E-mail : sales@interlam.co.id
Website : www.interlam.co.id

simalube - now even better!


- Now available in four new sizes (30, 60, 125 und 250 ml)
- Improved and more reliable lubrication at higher temperatures
- Higher working pressure at maximum 5 bar
- Short initial periods





Technical data simalube lubricator

Type	Automatic longterm grease and oil dispenser
Power generation	hydrogen gas producing drycells
Working pressure	max. 5 bar
Content	30, 60, 125 oder 250 ml
Adjustment	Stepless 1 - 12 months
Operating temperature	-20 bis + 55°C (-4°F to + 131°F)

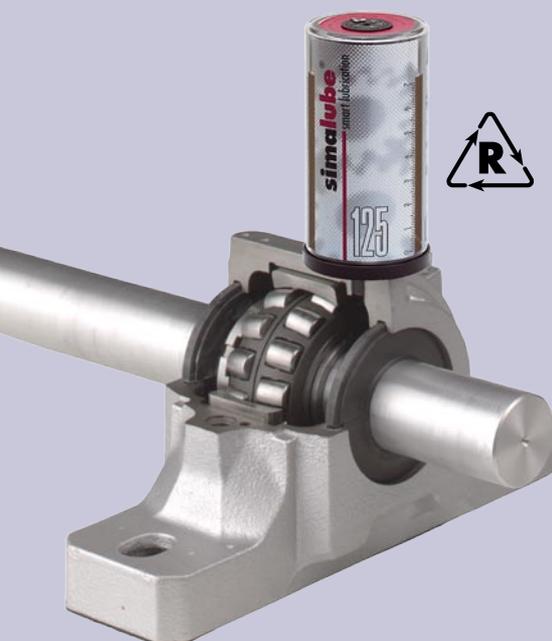

simatec ag

Stadthof 2
CH-3380 Wangen a. Aare
Phone: +41 (0)32 636 50 00
Fax: +41 (0)32 636 50 19
welcome@simatec.com
www.simatec.com

www.int-lam.co.id

Trust the Original!

Any bearing deprived of correct lubrication will fail within its predicted lifespan leading to high repair costs. Therefore simatec technology developed an advanced generation of simalube - the automatic single point lubricator which has been proven over millions of times.

simalube lubricates automatically the lubrication points according to the needed quantity. Thanks to the worldwide patented gas generating dry cell, simalube satisfies the highest precision. simalube will operate automatically 24 hours a day, 7 days a week, adjustable from 1 month to 12 months.

simalube practical benefits:

- Reliability - allowing fit and forget procedures until predetermined replacement time.
- Flexible time setting from 1 to 12 months reduces inventory costs as one lubricator covers a wide range of time settings.
- Easy adjustment of dispensing rate during operation.
- Can be temporarily deactivated.
- Refillable.
- Available in four sizes: 30, 60, 125 and 250 ml.
- Transparent container to check lubricant levels.
- High capacity, compact size permits installation in restricted areas.
- Hermetic sealing prevents ingress of dirt or foreign matter.
- No harmful chemicals to generate the drive gas.
- Environmentally friendly. Easy to dispose.
- Intrinsically safe, various safety approvals, Ex, GS, and FM.
- Wide range of accessories is available such as adapter nipples, tubes and brushes.

simalube standard lubricants

Nr.	Application	Temperature range (in the area of lubrication)	Base oil	Thickener	Oil viscosity at 40°C
SL01	multipurpose grease	-30 / +120°C	mineral oil	Li/Ca	118 mm ² /s
SL02	multipurpose grease with MoS ₂	-25 / +130°C	mineral oil	Li	270 mm ² /s
SL04	high temperature grease	-20 / +160°C	mineral oil	Be	555 mm ² /s
SL06	fluid grease	-40 / +110°C	mineral oil	Li/Ca	98 mm ² /s
SL09	biodegradable grease	-20 / +80 / 100°C	ester oil	Li/Ca	100 mm ² /s
SL10	food industry grease	-30 / +140°C	synthetic	Al	118 mm ² /s
SL14	chain oil	-10 / +90°C	mineral oil		68 mm ² /s
SL15	high temperature chain oil	0 / +250°C	synthetic		265 mm ² /s
SL18	food industry oil	-15 / +150°C	synthetic		220 mm ² /s
SL24	wide temperature grease	-30 / +150°C	mineral oil	Li/Complex	200 mm ² /s
SL25	high temperature grease	-20 / +180°C	mineral oil	Polyurea	110 mm ² /s

