


12.19/0194

**Packing type:**

**SIRPACK 3404**

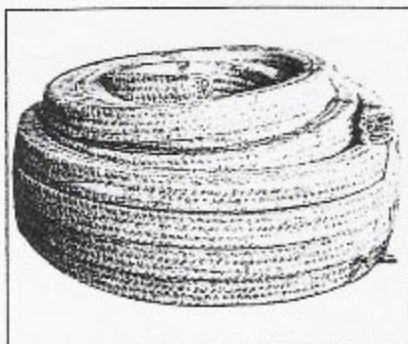

**Material:**

Twisted PAN non preox. yarns

White colour.

**Treatment:**

Impregnation with PTFE and inert lubricants free from silicone.

**Use:**

Pumps, valves, mixers. Chemical, pharmaceutical and food Industries.

Thermoelectric power stations.

Very stable against temperature, chemically inert, no friction.

	valves	piston pumps	rotary pumps
Temperature - °F	-112 +480	-112 +480	-112 +480
Pressure - PSI	1430	1145	430
Velocity - m/sec	2	1.5	4
pH	1 + 13	1 + 13	1 + 13

**Materiale:**

Fili ritorti di fibre poliacrilonitriliche non preossidate (PAN). Colore bianco.

**Trattamento:**

Impregnata con PTFE e lubrificanti inerti esenti da siliconi.

**Utilizzi:**

Pompe, valvole, miscelatori e agitatori. Industria chimica, farmaceutica, alimentare, centrali termoelettriche. Buona stabilità, assenza di attrito, inerzia chimica.

	valvole	pistoni	pompe ruotanti
Temperatura - °C	-80 +250	-80 +250	-80 +250
Pressione - bar	100	80	30
Velocità - m/sec	2	1.5	4
pH	1 + 13	1 + 13	1 + 13